



3C95
3C97

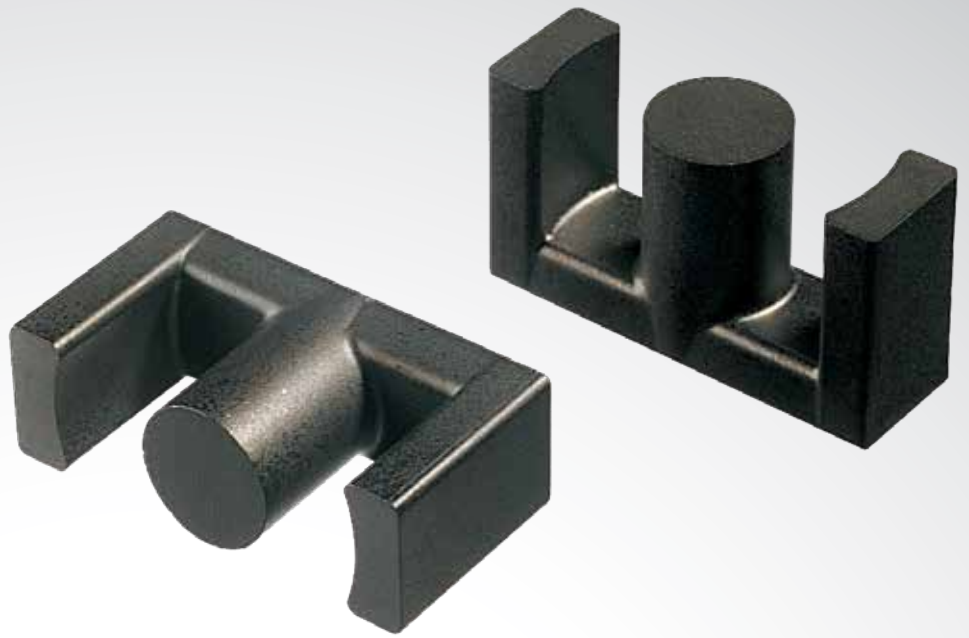

 FERROXCUBE

Extreme ferrites
for extreme conditions

Low power loss,
wide temperature
for power conversion

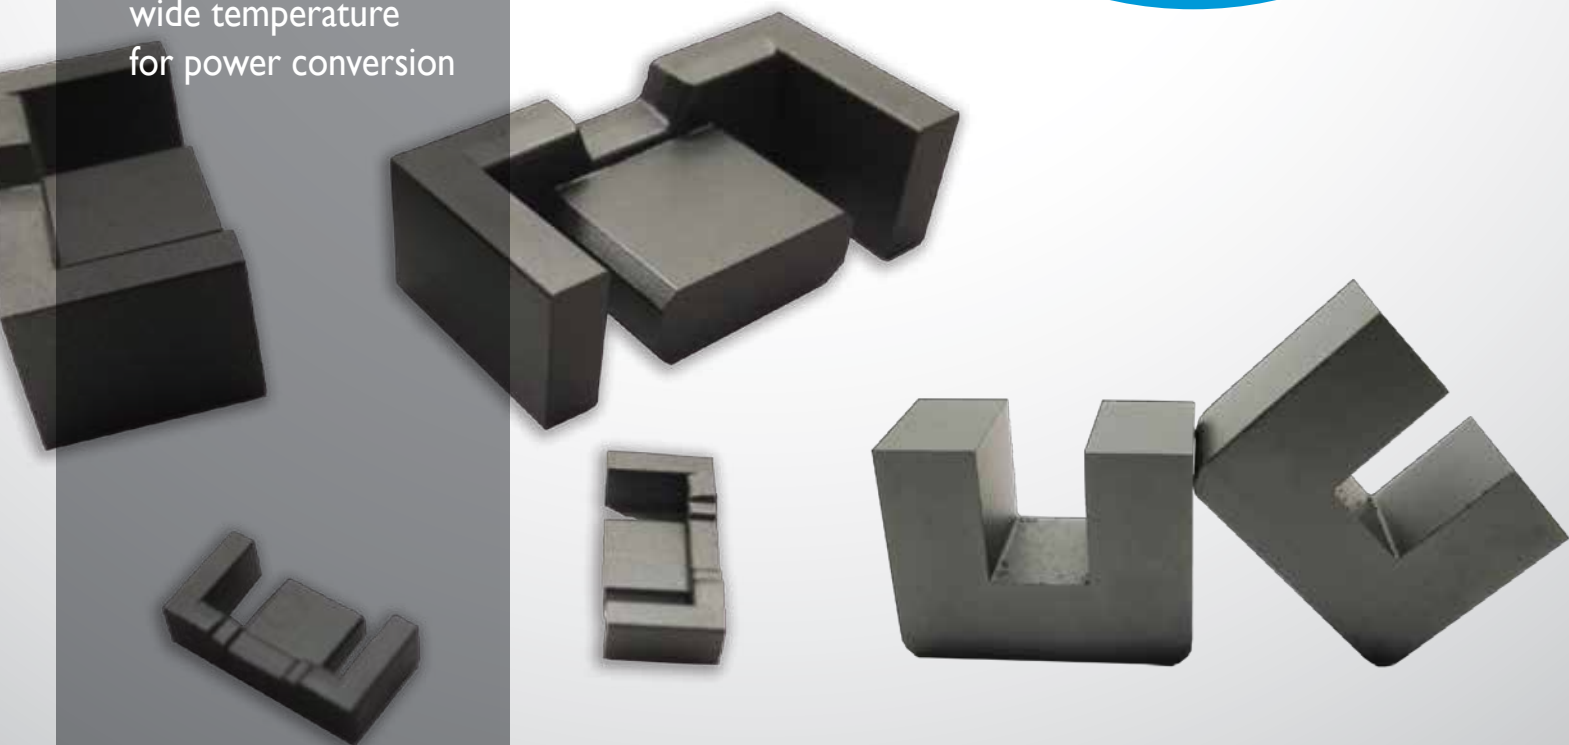





Formerly, a Philips Components company we now belong to the Yageo Group, one of the world's strongest suppliers of passive components. As a leading supplier of ferrite components, FERROXCUBE has manufacturing operations, sales offices, and customer service centers all over the world.

We supply one of the broadest ranges of high-quality, innovative products and place strong emphasis on miniaturization of magnetic functions. Ferrite components and accessories from FERROXCUBE are used in a wide range of applications, from telecommunications and computing electronics through consumer electronic products to automotive.

FERROXCUBE as the leading manufacturer in the ferrite industry, has been providing to the power conversion industry ferrite cores with low power losses and high saturation magnetic flux density over a wide range of operating frequencies (20kHz to 10MHz). This has allowed us to support today's manufacturers of power conversion systems in their drive for greater miniaturization, lower weight and reduced power consumption in applications where the temperature rise and maximum achievable temperature can be estimated.

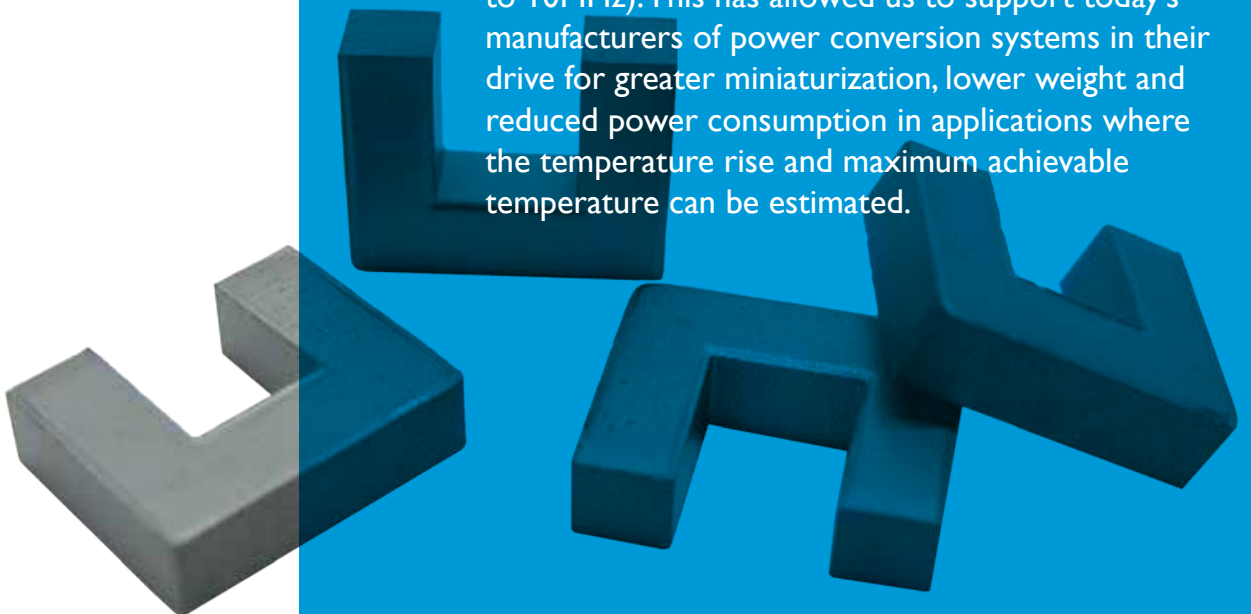

The power loss density versus temperature curves for 3C95 is very flat and losses vary little from room temperature to over 100 °C . This holds for various conditions of frequency and flux density. Traditionally, power material is optimized at 100 °C for use in industrial equipment and special materials are developed for other temperature ranges. This does not solve the problem for applications where large variations in operating temperatures occur for which the 3C95 material has been developed. Typical examples are electronic lighting ballast, and automotive electronics which are mounted in the proximity of the engine.

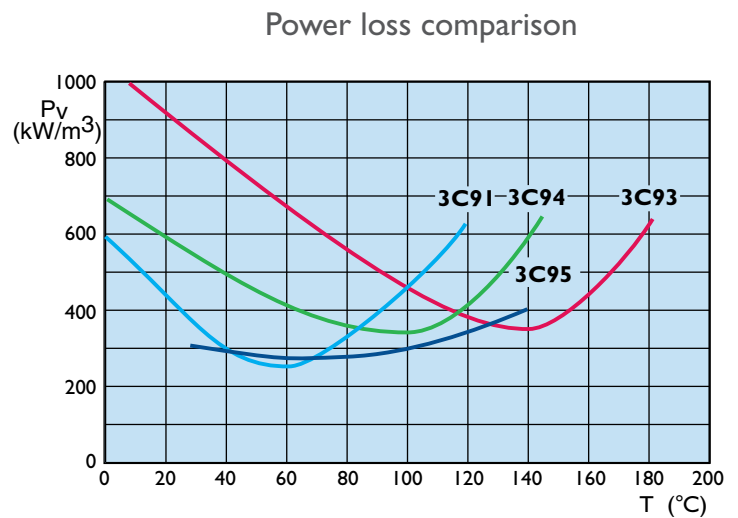

Ferroxcube has started the introduction of the new material in regular core shapes for power applications such as E, U, EFD, ER, EQ, PQ, RM and planar shapes. The loss level competes with most current Ferroxcube grades and so does the saturation level. See below for a comparison of the loss density of different materials with that of 3C95.

Applications for 3C95 can be found in various areas:

- Automotive electronics near the engine

Temperatures vary from ambient temperature at motor start, which might be below zero, to far over 100°C for a steadily running motor. More power applications appear on the horizon like DC/ DC converters for 42V systems in hybrid vehicles.

- Electronic lighting ballasts


Also here temperatures vary from ambient temperature at lamp ignition (e.g. outdoor lighting) to well over 100°C for a steady state of operation in certain discharge lamps. Conditions can be especially challenging in hot restart situations.

- Mobile/handheld devices

Working temperatures have to be lower than in industrial equipment and are typically in the 50~60°C range. This range is perfectly covered by 3C95.

3C95

The standard for broad temperature range applications

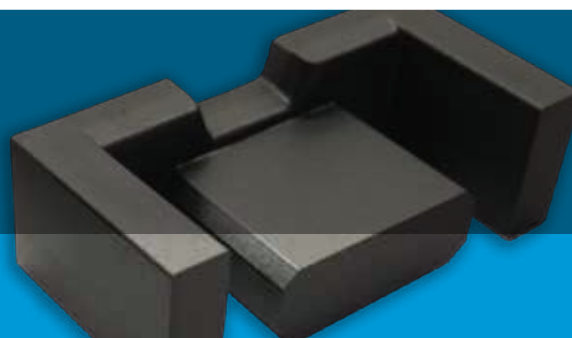

Material Specifications

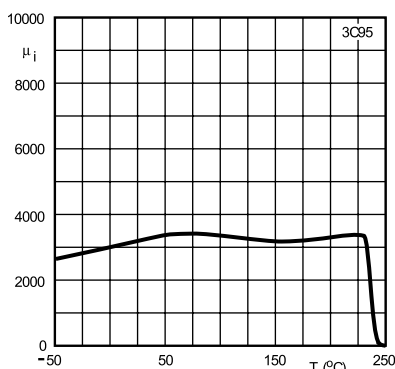


Fig. 1 Initial permeability as a function of temperature

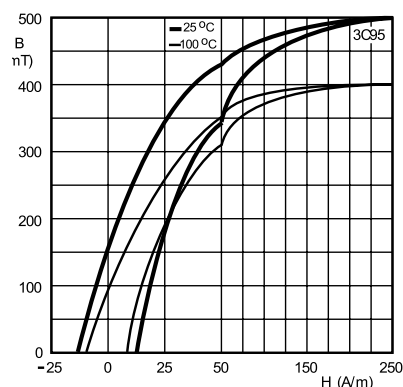


Fig. 2 Typical B-H loops

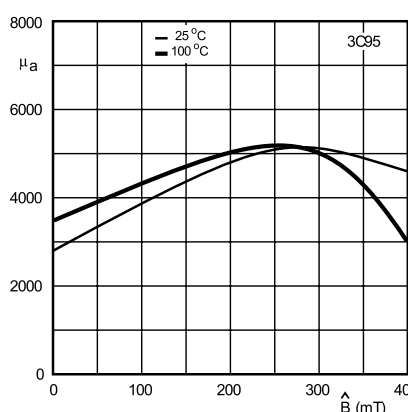


Fig. 3 Amplitude permeability as a function of peak flux density

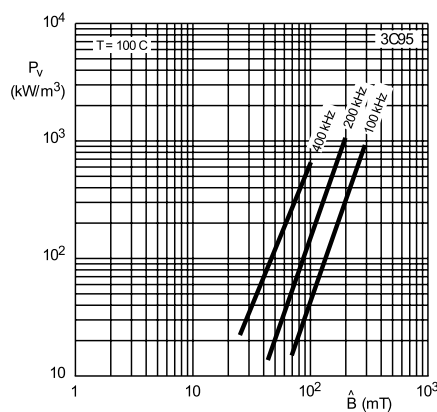


Fig. 4 Specific power losses as a function of peak flux density with frequency as a parameter

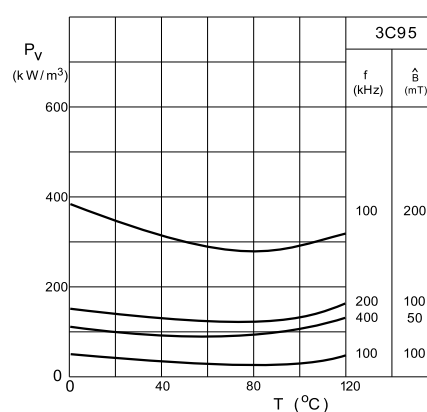



Fig. 5 Specific power losses for several frequency/flux density combinations as a function of temperature

| Symbol | Conditions | Value | Unit |
|---------|-------------------------------|----------|-------------------|
| μ_i | 25 °C; ≤ 10 kHz, 0.25 mT | 3000±20% | |
| μ_a | 100 °C; 25 kHz, 200 mT | ≈ 5000 | |
| Bsat | 25 °C; 10 kHz, 1200 A/m | ≈ 530 | mT |
| | 100 °C; 10 kHz, 1200 A/m | ≈ 410 | |
| P_v | 25 °C; 100 kHz; 200 mT | ≈ 350 | kW/m ³ |
| | 100 °C; 100 kHz; 200 mT | ≈ 290 | |
| ρ | DC; 25 °C | ≈ 5 | Ωm |
| T_c | | ≥ 215 | °C |
| Density | | ≈ 4800 | kg/m ³ |

Ferroxcube extends its all temperature power ferrite range with a new power material: 3C97 will not only offer high power density and reduced volume, but also increased efficiency when used in harsh environmental applications with high ambient temperatures and wide temperature fluctuations.

Ferroxcube's all temperature power ferrite range will make the design of true high energy-efficient products possible, since the transformer will keep the industry's lowest loss levels independently of the environmental temperature and loading. The new 3C97 power material is characterized by a flat Power density vs. Temperature curve between 60°C and 140°C achieving an improved efficiency over 3C95 in this temperature range.

Power loss comparison

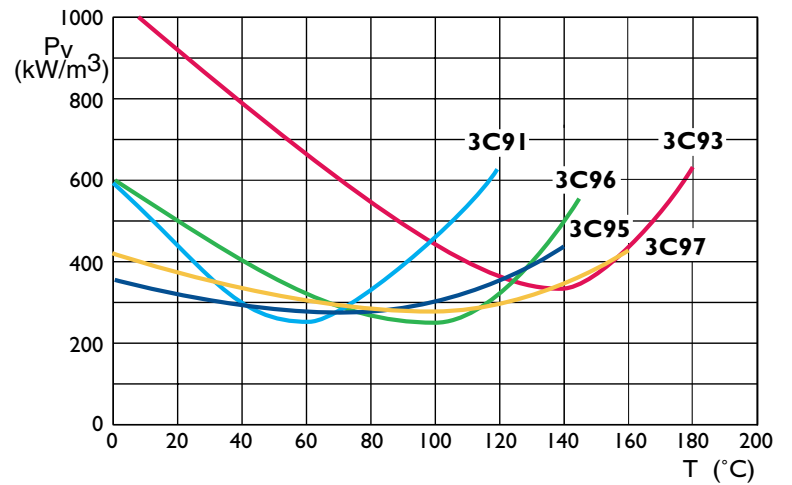


Applications for 3C97 can be found in various areas:

- Outdoor solar inverters, power-charging systems for electric vehicles
- DC/DC converters for electric and hybrid cars, automotive electronics in general
- Rugged systems suited to railways, heavy industry as well as other applications in adverse environments

3C97

All temperature power ferrite

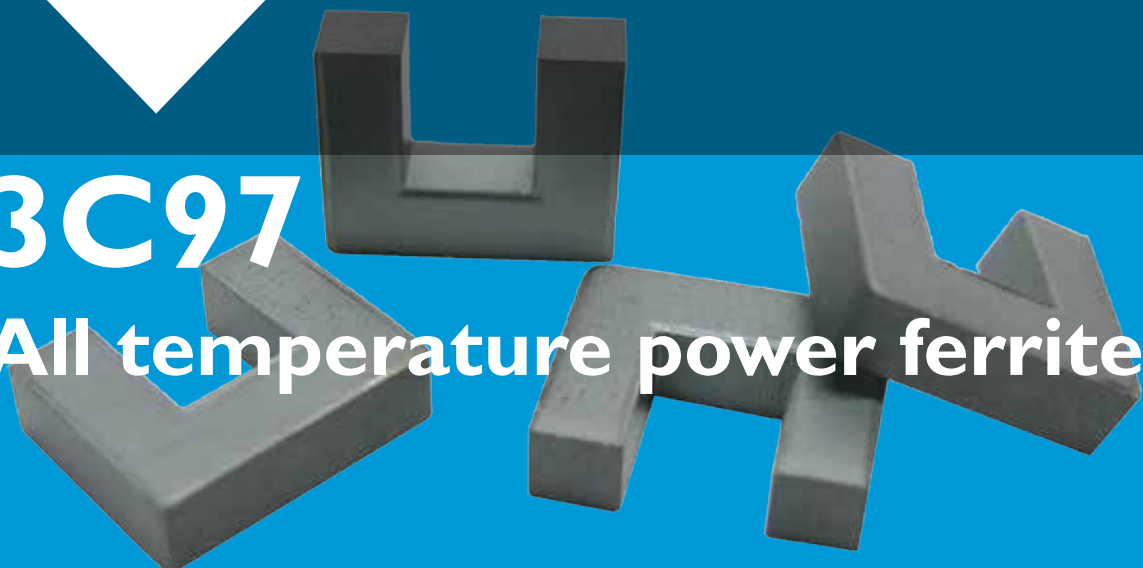

Material Specifications

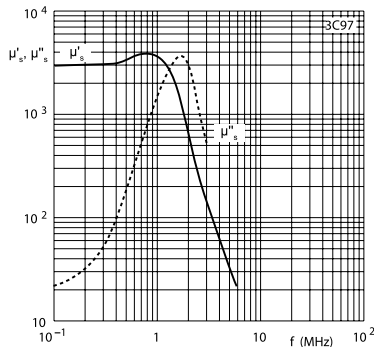


Fig. 1 Complex permeability as a function of frequency

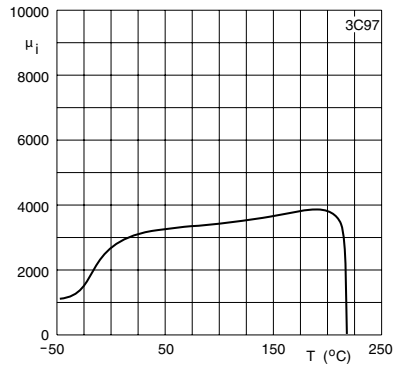


Fig. 2 Initial permeability as a function of temperature

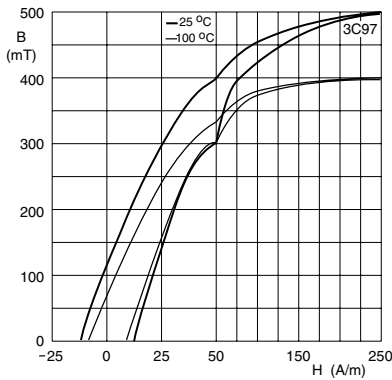


Fig. 3 Typical B-H loops

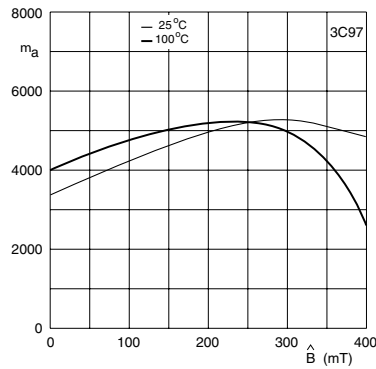


Fig. 4 Amplitude permeability as a function of peak flux density

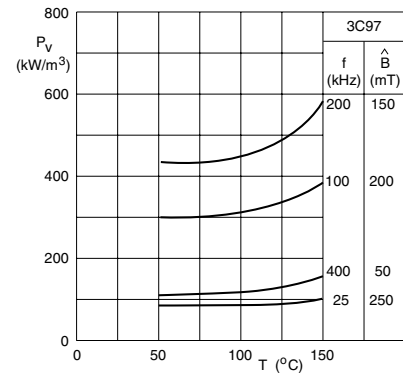


Fig. 5 Specific power losses for several frequency/flux density combinations as a function of temperature

| Symbol | Conditions | Value | Unit |
|---------|-------------------------------|----------|-------------------|
| μ_i | 25 °C; ≤ 10 kHz, 0.25 mT | 3000±20% | |
| μ_a | 100 °C; 25 kHz, 200 mT | ≈ 5000 | |
| Bsat | 25 °C; 10 kHz, 1200 A/m | ≈ 530 | mT |
| | 100 °C; 10 kHz, 1200 A/m | ≈ 410 | |
| P_v | 60 °C; 100 kHz; 200 mT | ≈ 320 | kW/m ³ |
| | 100 °C; 100 kHz; 200 mT | ≈ 320 | |
| | 140 °C; 100 kHz; 200 mT | ≈ 380 | |
| ρ | DC; 25 °C | ≈ 5 | Ωm |
| T_c | | ≥ 215 | °C |
| Density | | ≈ 4800 | kg/m ³ |

FERROXCUBE - A GLOBAL COMPANY

HQ

Taipei, Taiwan
Ferroxcube Taiwan
Tel: +886 963 767 858
Fax: +886 2 6629 9999
Mail: wiki.hsiung@ferroxcube.com

ASIA

Dongguan, China
Ferroxcube China
Tel: +86 769 8681 8777
Fax: +86 769 8733 9561
Mail: King.lee@ferroxcube.com

Suzhou, China
Ferroxcube China
Tel: +86 512 6841 2350
Ext.203
Fax: +86 512 6841 2356
Mail: Eric.Xu@ferroxcube.com

Singapore
Ferroxcube South Asia
Tel : +65 6412 0875
Fax : +65 6412 0808
Mail:
adrian.toh.wee.yong@ferroxcube.com

Europe

Hamburg, Germany
Ferroxcube Germany
Tel: +49 40 883 66 020
Fax: +49 40 883 66 022
Mail:
saleseurope@ferroxcube.com

Lissone, (MB), Italy
Ferroxcube Italy
Tel: +39 0392 143 599
Fax: +39 0392 459 472
Mail:
saleseurope@ferroxcube.com

North America

El Paso (TX), USA
Tel: +1 915 599 2328
Fax: +1 915 599 2555
Mail: juan.carlos.gardea@ferroxcube.com

San Diego (CA), USA
Tel: +1 619 207 0061
Fax: +1 619 207 0062
Mail: joel.salas@ferroxcube.com

Vancouver (WA), USA
Tel: +1 915 599 2616
Mail: dan.pizarro@ferroxcube.com

Pittsburgh (PA), USA
Tel: +1 412 226 0048
Mail: michael.horgan@ferroxcube.com

Rochester (NY), USA
Tel: +1 585 364-3395
Mail: owen.davies@ferroxcube.com

For a complete listing of all
Ferroxcube sales offices, distributors,
and representatives, please visit
"contact us" at

www.ferroxcube.com

© Ferroxcube International Holding B.V. 2014

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.